



HARDING
STEEL

SUV and SUV-XL by Harding Steel



World-Class Lifts since 1968



**HARDING
STEEL**

SUV and SUV-XL by Harding Steel

The world's most popular commercial grade parking lift



Commercial, Mixed Use, and Multi-Family

Automotive Dealership Inventory Storage

Valet or Self-Operated Parking





SUV Lift Features

- 100% galvanized steel construction
- Commercial grade design and materials
- Dual hydraulic cylinders
- Self-standing, self-supporting unit
- Can be moved or relocated
- Central or individual hydraulic power pack
- Solid platform prevents dripping from upper level
- Accommodates most popular SUVs and minivans
- Available in Standard and Wide models

Safety

- Standard key-lock switch for security and safety
- Automatic shut-off if operator releases the key-switch
- Steel-on-steel locks hold the upper platform in place
- Manual lock release required to lower the unit
- Hydraulic velocity fuse protection

Dimensions

- Typical ceiling heights
 - 10'6" for two sedans
 - 11'6" for one car and one SUV
 - 12'6" or greater for 2 SUV's
- Width (side-to-side dimension)
 - 8'0" (standard model)
 - 8'6" (wide model)
- Length
 - 12'4" (total parking lift length on standard)
 - 13'0" (total parking lift length on wide)

Power Requirements

- 220V, 20 amp, single phase (for individual power pack)
- 220V, 3-phase, 40 amp for commercial central power pack
- 220V, single phase, 40 amp commercial power pack

Shipping and Installation

- Shipped by common carrier to most locations
- Installed by factory trained technicians




Warranty

- One year electrical, two year mechanical, five year structural








Harding Steel SUV Lift Specifications

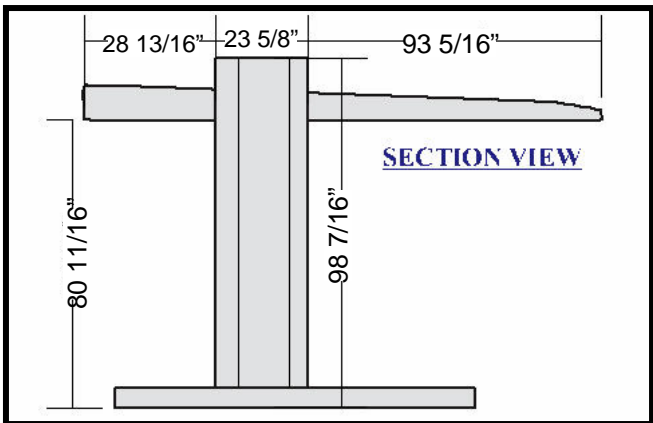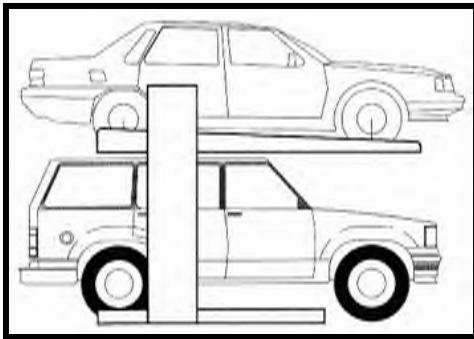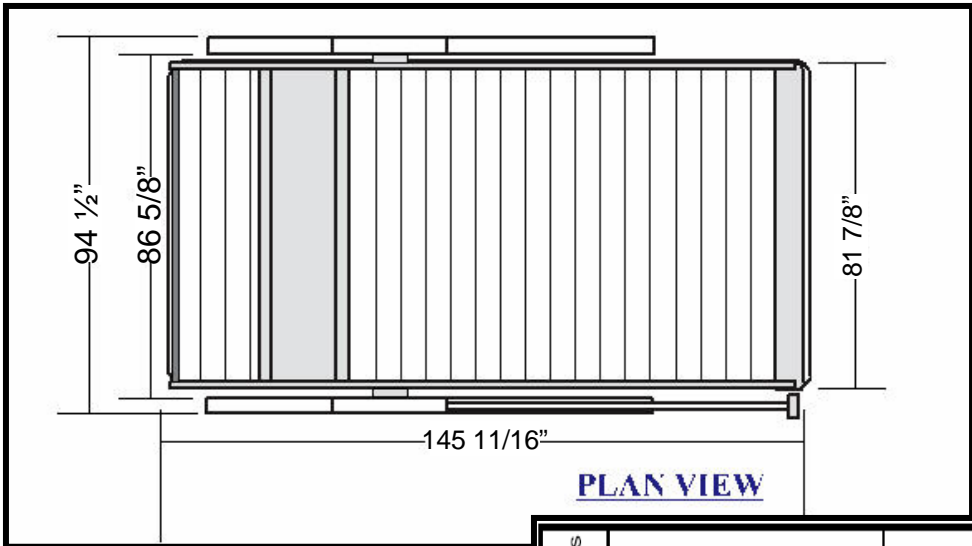

Capacities	Working Capacity	6,600 lbs.
	Static Capacity	13,200 lbs.
	Dynamic Capacity	9,900 lbs.
Dimensions	Overall Width	94 1/2 "
	Platform Width	81 7/8"
	Drive-thru Width	86 5/8"
	Overall Platform Length	145 11/16"
	Maximum vehicle wheelbase	141"
	Maximum clearance (lower car)	79"
	Overall height	98 7/16"
Speed	Lifting Speed (seconds)	17 seconds
	Lowering Speed (seconds)	15 seconds
Power	Power Requirements	220V 3 Phase 40 amp 220V Single Phase 40 amp
Features	Application	Outdoor/Indoor
	Surface	Asphalt/Concrete
	Material	100% Galvanized Steel
	Safety	Steel-on-Steel Locks



Harding Steel SUV-XL Lift Specifications

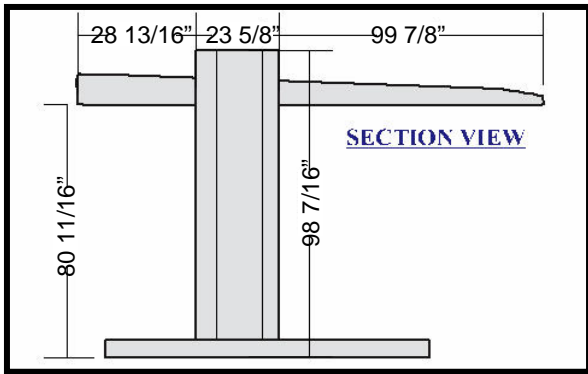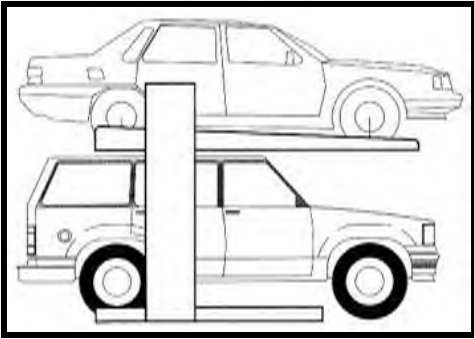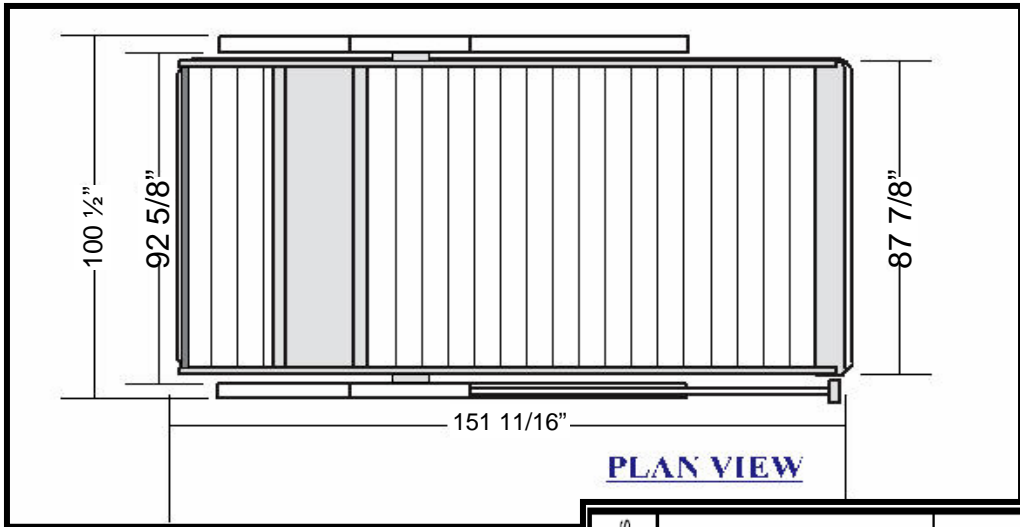

Capacities	Working Capacity	6,600 lbs.
	Static Capacity	13,200 lbs.
	Dynamic Capacity	9,900 lbs.
Dimensions	Overall Width	100 1/2 "
	Platform Width	87 7/8"
	Drive-thru Width	92 5/8"
	Overall Platform Length	151 11/16"
	Maximum vehicle wheelbase	146"
	Maximum clearance (lower car)	79"
	Overall height	98 7/16"
Speed	Lifting Speed (seconds)	17 seconds
	Lowering Speed (seconds)	15 seconds
Power	Power Requirements	220V 3 Phase 40 amp 220V Single Phase 40 amp
Features	Application	Outdoor/Indoor
	Surface	Asphalt/Concrete
	Material	100% Galvanized Steel
	Safety	Steel-on-Steel Locks